



Face
Impex Pvt.ltd.



Coming Soon....

**Wall Tiles Glaze
Polishing Machine**



Technical Specification

1. Max Working Width : 400 mm
2. Belt Size : 420 mm Width
3. Total Installed Power : 21.81Kw
4. Working Thickness : 4 mm-30mm
5. Dimension : L 2370 X W 1170 X H 2200 (mm)
6. Voltage : 415 V/50 HZ
7. Dust Collector Capacity Required : 8000 CMH

Application

Plain Buscuit of Wall Tiles

Capacity per hour

300X600 mm : 540 to 800 Boxes
300X450 mm : 600 to 850 Boxes

Benefit

1. Super Flatness.
2. Glaze saving 10 to 25 %.
3. Increased premium grade 1 to 2 %.



Ceramic Roller (Make :- SCIEN)
Outer Diameter : 33.7 MM to 65 MM
Length : 2200 MM to 5200 MM
Grade : S75 , S85 , S93 , S97 , S98



92% Alumina Balls
 92% Alumina Bricks
 68% Alumina Balls
 68% Alumina Bricks

Bricks Size :
 92% Alumina Bricks
 150X50X60/40 MM
 150X45/50X60/40 MM

Density :-

Hardness :-

Size : 30 MM, 40 MM,
 50 MM, 60 MM

68% Alumina Bricks
 150X40X100 MM



Diamond Squaring Wheel
Resin Bonded Tools
Lapato Abrasive
Diamond Abrasive
Silicon Carbide Abrasive
Diamond Roller



Water Proof Engobe Frit
Type :
 Low Thermal Frit
 High Thermal Frit
 Also Readymate Waterproof Engobe available.



SANITARY KILN FURNITURE
 ●Extruded Batt
 ●Sisic Beam
 ●Piller
 ●Splicer & Caps
 ●Block



Silicon Burner Tube

Other
Raw Materials


TR VITROSA
Polishing Vitrosa

Cera Decorative Material
BELLFLOW Printing Powder

Other
Machineries

AUTOMATIC CUTTING MACHINE
AUTOMATIC PACKING LINE

AUTOMATIC PAPER COATING MACHINE
AUTOMATIC STACKING MACHINE

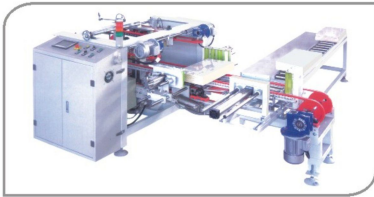

FACE IMPEX PVT. LTD.

Importer & Exporter

Shakti chambers, Shop No. 58/88,
8-A National Highway, MORBI-363 642 (Gujarat) India

Tel : +91-2822-244720 • Mo : +91-98791 30666
E-mail : nitin@faceimpex.com • Web : www.faceimpex.com